


WIRING RELAYS FOR REVERSE POLARITY DOOR LOCKS

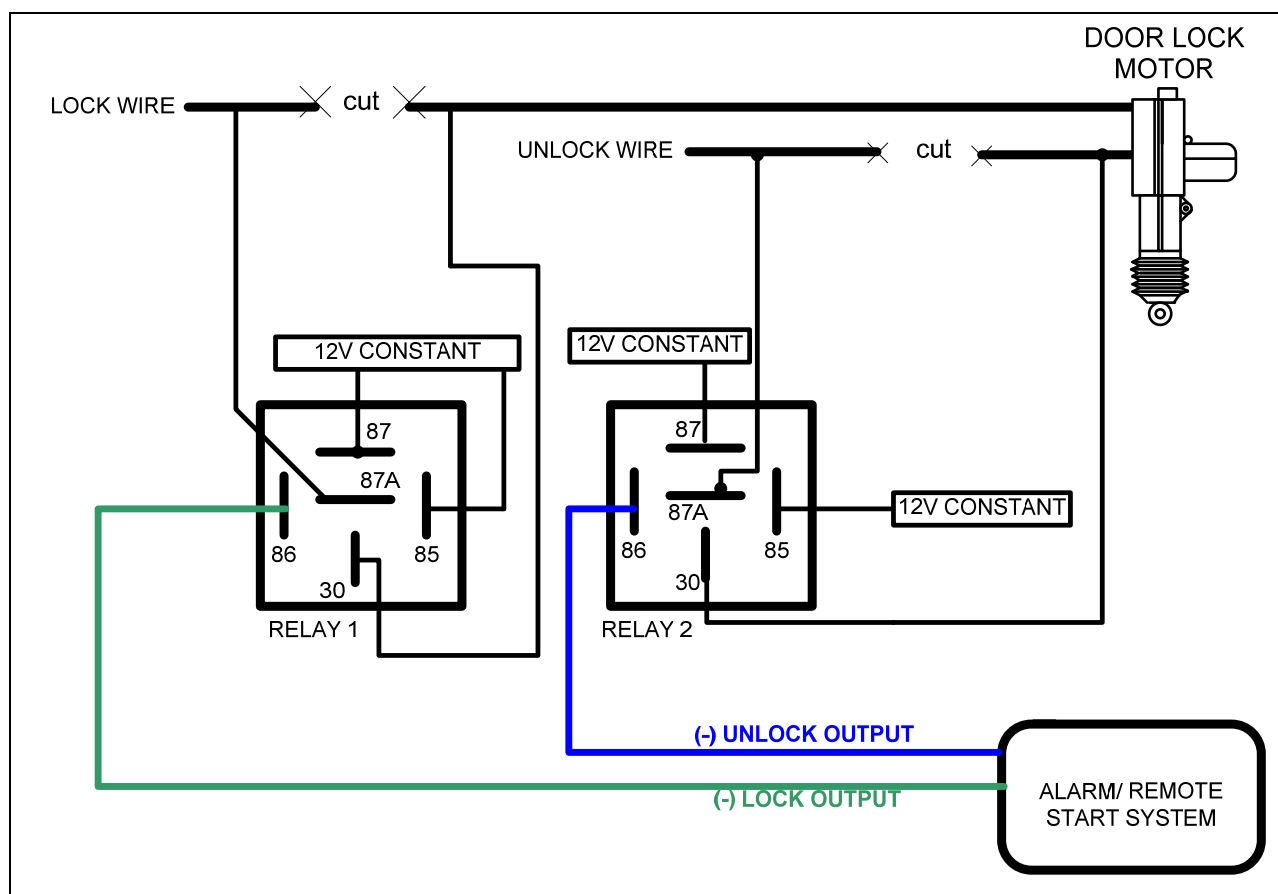

RELAY 1

PIN	CONNECTION
85	TO 12V CONSTANT
86	TO (-) LOCK OUTPUT FROM ALARM/REMOTE START SYSTEM
87	TO 12V CONSTANT
87A	TO DOOR LOCK WIRE GOING TO SWITCH
30	TO DOOR LOCK WIRE GOING TO MOTOR

RELAY 2

PIN	CONNECTION
85	TO 12V CONSTANT
86	TO (-) UNLOCK OUTPUT FROM ALARM/REMOTE START SYSTEM
87	TO 12V CONSTANT
87A	TO DOOR UNLOCK WIRE GOING TO SWITCH
30	TO DOOR UNLOCK WIRE GOING TO MOTOR